




TECHNISCHE BIJLAGE - AFMETINGEN AVK SCHUIFAFSLUITERS

APP. 4


INBOUWMATEN:

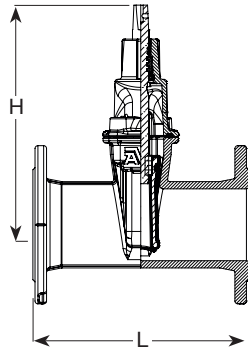

DN	Afsluiters volgens EN 1074-1 & 2, type A (DIN 3352 deel 4)			Afsluiters volgens EN 1074-1 & 2, type B (BS 5163)	
	Bouwafm. EN 558-F14 (DIN3202 deel 1, F4) L mm	Bouwafm. EN 558-F15 (DIN3202 deel. 1, F5) L mm	Hoogte boven middellijn H mm	Bouwafm. EN 558-F3 L mm	Hoogte boven middellijn H mm
25	-	120	180	-	-
32	-	140	190	-	-
40	140	240	241	-	-
50	150	250	241	178	279
65	170	270	271	190	279
80	180	280	297	203	294
100	190	300	334	229	324
125	200	325	376	254	324
150	210	350	448	267	429
200	230	400	562	292	531
250	250	450	664	330	614
300	270	500	740	356	690
350	290	550	940/930	381	867
400	310	600	940/960	406	867
450	330	650	951*/1170**/1130***	-	-
500	350	700	951*/1140**/1130***	-	-
600	390	800	- /1280**/1270***	-	-
700	430	-	- / 1280**/1270***	-	-
900	510	-	2118	-	-
1000	550	-	2067	-	-

* Serie 02 ** Serie 06 *** Serie 55

SPINDELAFMETINGEN:

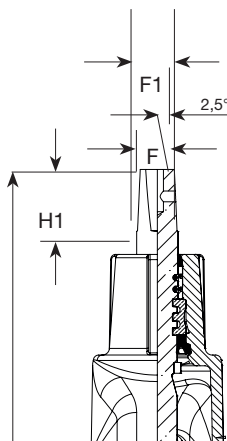

DN	Dienstkransen				Afsluiters volgens EN 1074-1 & 2, type A (DIN 3352 partie 4)			Afsluiters volgens EN 1074-1 & 2, type B (BS 5163)		
	H mm	H1 mm	F mm	F1 mm	H1 mm	F mm	F1 mm	H1 mm	F mm	F1 mm
25	180	35	12.3	15.4	-	-	-	-	-	-
32	190	35	12.3	15.4	-	-	-	-	-	-
40	203	35	12.3	15.4	29	14	16.6	-	-	-
50	213	35	12.3	15.4	29	14	16.6	38	19	22.4
65	-	-	-	-	34	17	20.0	38	19	22.4
80	-	-	-	-	34	17	20.0	38	19	22.4
100	-	-	-	-	38	19	22.4	38	19	22.4
125	-	-	-	-	38	19	22.4	38	19	22.4
150	-	-	-	-	38	19	22.4	42	24	27.7
200	-	-	-	-	42	24	27.7	47	27	31.2
250	-	-	-	-	47	27	31.2	47	27	31.2
300	-	-	-	-	47	27	31.2	47	27	31.2
350	-	-	-	-	55	32	36.9	55	32	36.9
400	-	-	-	-	55	32	36.9	55	32	36.9
450*	-	-	-	-	55	32	36.9	-	-	-
500*	-	-	-	-	55	32	36.9	-	-	-
450**	-	-	-	-	84	ø40	ø40	-	-	-
500**	-	-	-	-	84	ø40	ø40	-	-	-
600**	-	-	-	-	83.5	ø30/40	ø30/40	-	-	-
700	-	-	-	-	83.5	ø40	ø40	-	-	-
800	-	-	-	-	83.5	ø40	ø40	-	-	-
900	-	-	-	-	83.5	ø40	ø40	-	-	-
1000	-	-	-	-	83.5	ø40	ø40	-	-	-

* serie 02 en 20 ** voor serie 55/30-ø30 voor serie 06

